

DATASHEET

STCS

BM3

The STCS-BM3 (Bubble Machine) is a manually operated pneumatic device, intended to be used as a convenient “in-process” sampling technique for testing sealed splices.

It has a built-in current leakage detection system that detects the shrink tube’s poke-through.

It can be supplied with special test chambers for big cross-section cables.





Reference of the product

14-03-0005

Technology

 Test System

> Media for this machine

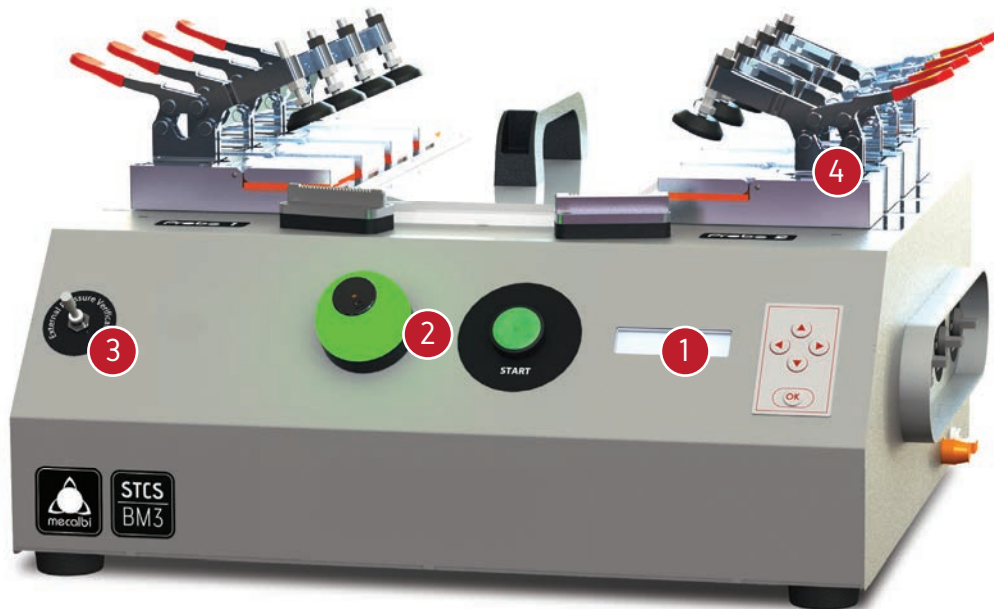

Real time automatic pressure test adjustment



Built-in current leakage detection system for poke-through detection with visual and sound alarms



External pressure test verification



Option of using special chambers, mechanically compatible with normal chambers, to test big cross-section cables

Technical Data

WORKING TEMPERATURE

Min - Max [°C] / [°F]	-
-----------------------	---

SHRINKING TIME

Min - Max [s]	-
---------------	---

MEASUREMENTS

Width; Length; Height	560; 490; 270 [mm] 22; 19.3; 10.6 [in]
-----------------------	---

Weight [kg] / [lbs]	25 / 55.1
---------------------	-----------

POWER SUPPLY/CONSUMPTION

Supply	230 [V] @ 50Hz
--------	----------------

Consumption	50 [mA] to 1 [A] (Max.24W)
-------------	----------------------------

PNEUMATIC

Supply	Quick Hold Socket Ø8 [mm]
--------	---------------------------

Supply Pressure	Min: 0.5bar; Max: 2bar
-----------------	------------------------

CONNECTIONS

Barcode Reader	-
----------------	---

Temperature Sensor	-
--------------------	---

Power Line	1 IEC Socket
------------	--------------

Programming	Membrane Keyboard
-------------	-------------------

Interface	Membrane Keyboard, LCD 16x2, Buzzer, LED
-----------	---

CHAMBER

Chamber [mm] / [in]	30x40x10 / 1.2x1.6x0.4
---------------------	------------------------

Min-Max Tube Ø [mm] / [in]	-
----------------------------	---

Min-Max Tube Length [mm] / [in]	-
---------------------------------	---

Min-Max Cable Ø [mm] / [in]	0-6.5 / 0-0.3
-----------------------------	---------------

Min-Max Cable Length [mm] / [in]	-
----------------------------------	---


CALIBRATION

Calibration Probe	-
-------------------	---

Features

- Automatic air pressure adjustment;
- Selection of which chambers receive test pressure, for air economy;
- Configurable test time and test pressure;
- Built-in current leakage detection system, for detection of poke-through;
- Bubble and poke-through test counter;
- Manual internal calibration;
- Password protected menu;
- Error lock (password protected);
- Air fault detection;
- Interchangeable system language, including: English, Portuguese, French and Spanish (others on demand);
- Minimal skills required for operating with the machine;
- Special chambers for big cross-section cables.

Options



- **Special test chamber (>Ø6.5)**
Ref: 06-01-0127



- **Test chamber for terminals**
Ref: 06-01-0297



- **Clamps for test systems**
Ref: 06-01-0173